AQUAPRO Enamel Paint 水性磁漆 112

Usage 用途

This water based enamel paint 112 series is a high quality, multi-purpose coating for a variety of interior and exterior applications on all metal and wood surfaces. It is jet dry, easy application and contains low VOC content. The dry film provides very good adaptability to environmental changes. and displays high gloss and attractive film build which come along with excellent gloss retention and durability.

此水性磁漆 112 系列惠為保護及粉飾室內 及室外之金屬或木器表面而設,低VOC 含量,施工簡易及快乾。施工後,漆膜能 抵受天氣及環境侵蝕,不易磨損;其光澤 飽滿及持久,美觀耐用。

Features 特點







 High gloss / Low gloss ・光澤飽滿 / 低光

Good aloss retention





 Low VOC • 低 VOC

Ease of application

• 施工簡易

Size 裝別

1. 3 and 18 liter 1,3及18升

Application 施工方法



No. of coats: 2 coats 層數:2層



Ready-to-use after thinning. 以清水稀釋後可即時使用

Thinning Ratio 稀釋分量

By brush / roller: Dijute 10 parts of the paint with 1 - 2 parts of clear water (10 1 - 2 by volume).

掃塗/轆塗:按容量比例,每10份油漆加 入1-2份清水稀釋。

Drying Time 乾燥時間

Touch dry: 1 hour Hard dry: 2 hours Recoat: 4 hours

指觸乾:1小時

重塗:4小時

The above contents are subject to change without prior notice. If you have any questions regarding the quality or application, please contact our dealers or

上述資料如有更改,恕不另行通知。如有任何品質或施工問題,請與各大五金油漆代理或本公司查詢。

Coverage 塗蓋面積

Approx. 8 m²/ltr. (at 2 coats, total of 60 um dry film thickness)

每公升約可塗蓋8平方米(以2層乾膜厚 度共60微米計算)

Primer 底漆

AquaPro Enamel Primer 113

This primer is especially designed for AguaPro Enamel Paint 112 series. This is suitable for all metal and wood surfaces, showing excellent adhesion to the substrates that reinforces the capability of topcoat. It is jet dry, easy application and contains low VOC

AguaPro 水性磁漆底漆 113

此水性底漆專為 Agua Pro (水性磁漆 112 系列而配製, 適用於各類金屬及木器表面, 並對此類表面有特強的附著 力,大大加強面漆的功能。 同時,低 VOC 含量,施工 簡易及快乾。



Surface Preparation 表面處理

Ensure the surface is free from oil. grease, moisture, rust and foreign matters. Remove the old paint film before recoating.

施工表面必須完好、乾燥、清潔、無塵 無銹、不含油脂和其他污漬。重塗舊表面 時,必須先清除起粉及鱗片部份。

Regulated Product Code 受規管產品代碼

Quick Dry Enamels

快乾磁漆

P10 - 12

VOC Content VOC含量

≤ 250 g/ltr.

Shelf Life 保質期

36 months (from date of manufacturing) 36 個月(以罐上顯示生產日期起計算)






產品介紹



Tel: (852)2675 2333 Email: info@byaquapro.com www.camel.com.hk

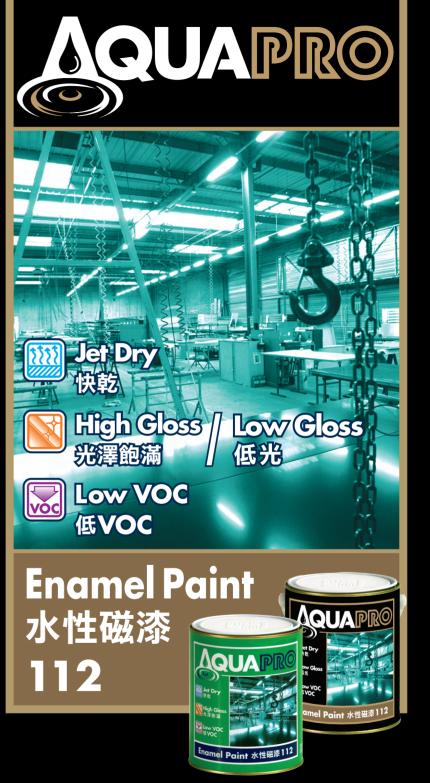

AQUAPRO Enamel Paint 水性磁漆 112


Low Gloss Series 低光系列




112LG - 2250 Momo Pink 粉桃



112LG - 2634 Coral Ice 橙杏



112LG - 2846 Avocado Smoothie 淡果綠




112LG -4141 Wax Yellow 淡黄




112LG - 1342 Erie 翠藍



112LG - 5031 Pink Clover 淺紫




112LG-1801 Baby Yellow 奶黄




112LG - 2774 Light Yellow 鵝黃



112LG - 3092 Lady Fingers 葵白



112LG - 2434 Bright Grey 珍珠灰



112LG - 5203 Limestone 石灰



112LG - 2435 Pastel Grey 粉彩灰



112LG - 1106 Lemon Yellow 檸檬黃



112LG - 2636 Caramel Brown 焦糖啡





Standard Series 標準系列



Remarks: Colors presented are as close as modern printing technique allows.


Also available in White 112-0111, Black 112-0999 and Clear 112-0222.

: 以上印刷色辦已儘量接近漆油實際顏色。 除上列顏色外,並備有白色 112-0111、黑色 112-0999 及 素色 112-0222。



Standard Series 標準系列







112-5267



Peacock Blue 孔雀藍

112-5386



Bronze 金色 112-0666